

Kinematic inversion of the full vector VSP P-wave field

A.TABAKOV, Y.STEPCHENKOV, A. RESHETNIKOV, N.RYKOVSKAYA
Geovers, ltd, Moscow, Russia.

Introduction

This work presents a method of complex velocity model estimation using VSP travel times. New opportunities of kinematic inversion procedure for reconstruction of velocity model parameters with the use of VSP travel times of different types of waves (direct wave as well as monotype and converted primaries) are developed. Smooth interfaces are described by cubic splines. Parameters of the model are velocities and vertical gradients of P and S waves.

Method

In case of media with curvilinear boundaries and non-uniform velocity distribution the problem of model parameters determination is divided into several basic phases. At the first phase the pressure wave velocities are reinstated in each of the layers with a certain accuracy using well-known layer section over all hodographs of the direct wave. It is considered the section boundaries to be straight. In this way the received zero-range approximation of the complex constructed medium is represented in the form of the horizontally schistose model. The next phase is a problem of making more precise the sectional boundary geometry with accuracy to polynomial of low degree (under the 4th degree) and also velocities and its vertical gradients of pressure and share waves within medium layers. Making more precise is accomplished with the use of VSP travel times of different types of waves (direct wave as well as all monotype primaries) by means of optimum minimization of the mean-square values of discrepancy of an initial and model travel times. At the final phase of medium model construction the sectional boundary geometry is made more precise in the form of cubic splines with smoothing over all hodographs of all present waves by means of a gradual addition of nodes and its optimum site selection. After making a change the reflecting boundary geometry its parameters are made more precise to the necessary degree within each of the medium layers. Selection of the reflecting boundary geometry and its parameters is accomplished by means of the modified algorithm of Hooke-Jeeves's multidimensional optimization (Гергель et al., 2001). The model hodographs are calculated in the complex constructed media by means of algorithm of the ray tracing method (Табакoв et al., 2002).

Results

The exact velocity model is shown in Figure 1. Transparency is used for designation of shadow zone. Zero range velocity model and wave field with all laid model travel times (direct wave as well as monotype and converted primaries) is shown in Figure 2. The results of velocity model selection with polynomial boundaries over all travel times of different types of waves using well known initial layer section are represented in Figure 3. In Figure 4 the results of velocity model optimization in case of spline boundaries and the corresponding hodographs are represented. Further the mean square values of discrepancy over travel times of all used waves are shown in Figure 5. Discrepancy values are intended for the zero-range approximation model and also the models with boundaries represented by polynomials and splines. Thus, as a result of these performed calculations the received consistent velocity medium model is in accordance with expected result.

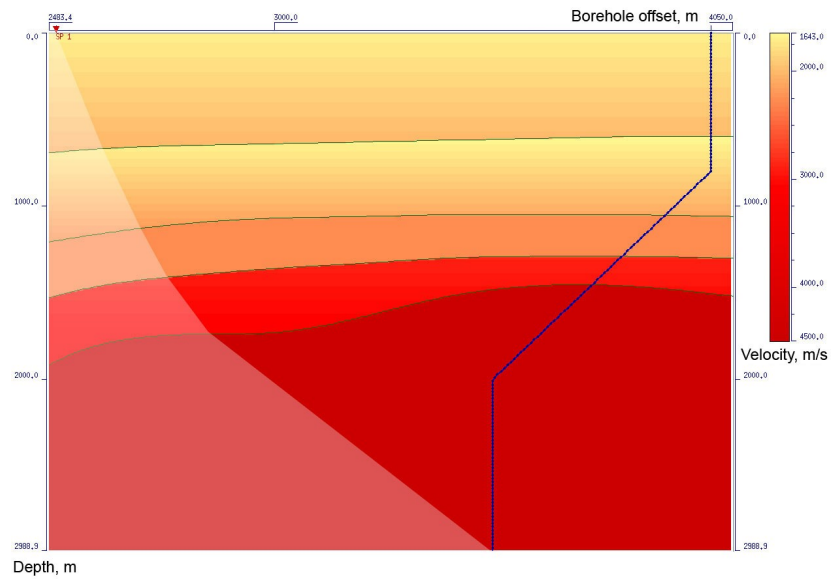


Figure 1. Exact velocity model

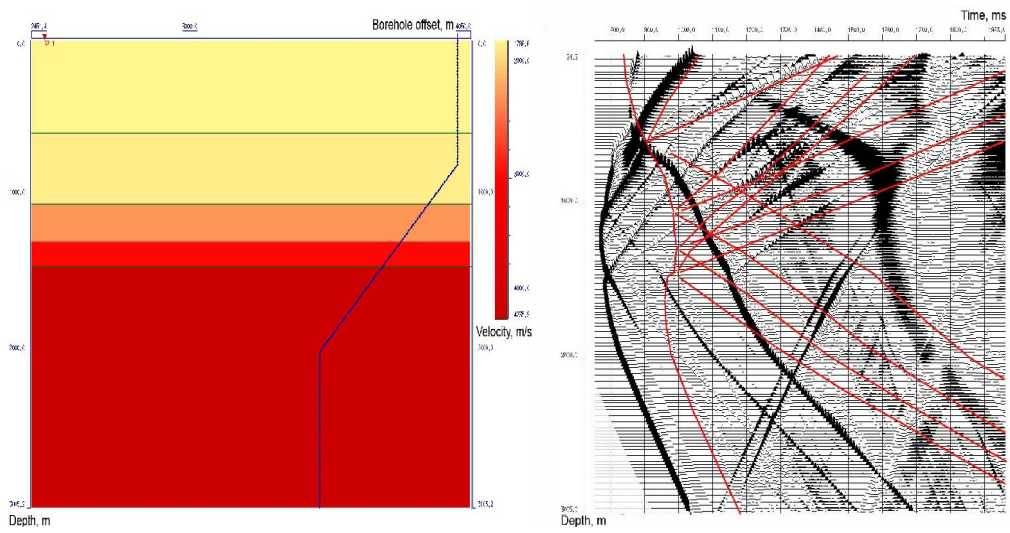


Figure 2. Zero range velocity model and wavefield with model hodographs

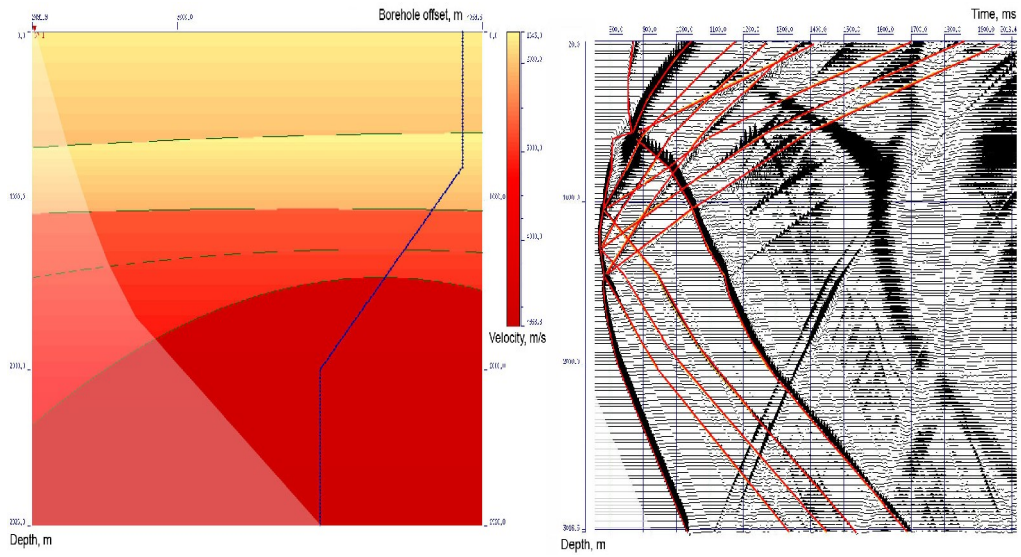


Figure 3. Velocity model with polynomial boundaries and wavefield with model hodographs

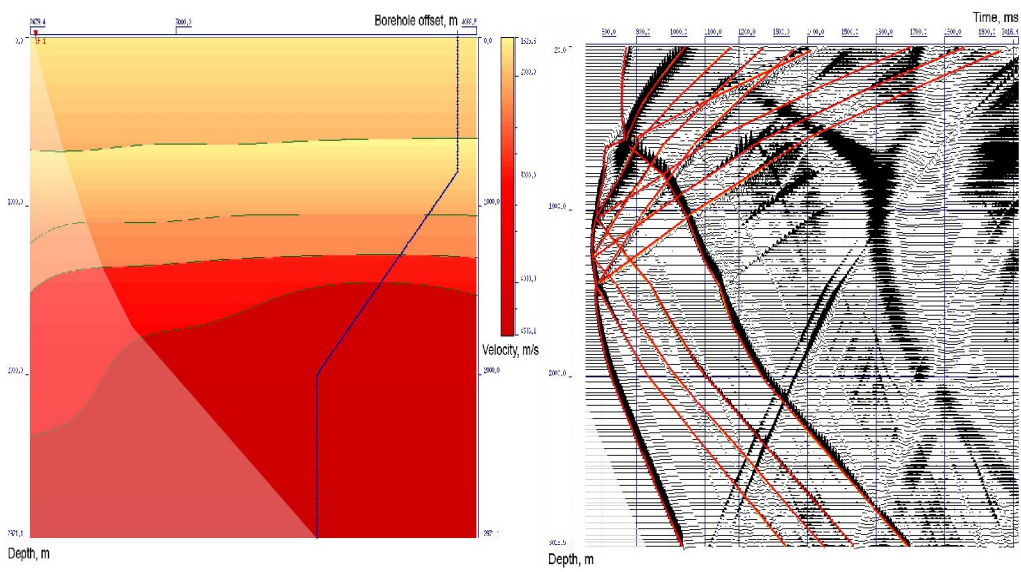


Figure 4. Velocity model with spline boundaries and wavefield with model hodographs

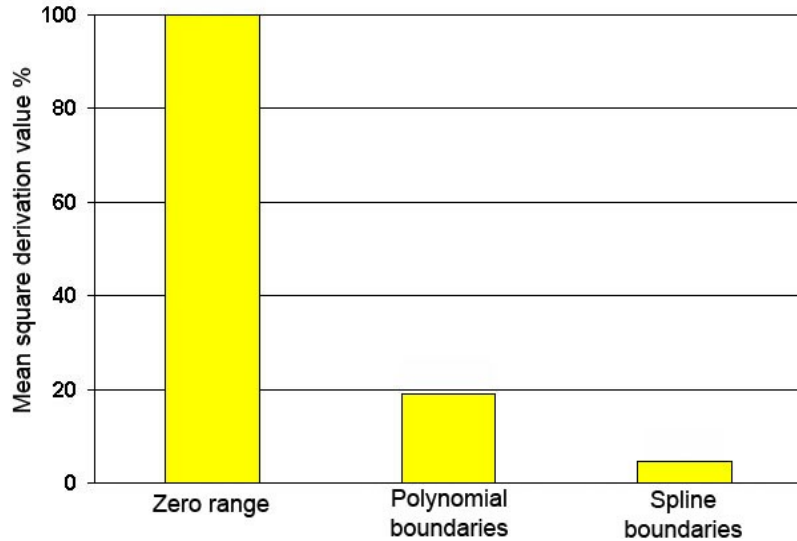


Figure 5. The mean square values of discrepancy over travel times of all used waves.

References

- 1) Ryzhikov G.A., Troyan V.N. 1994. Tomography and inverse problem of remote investigation, Sankt-Peterburg (*in Russian*)
- 2) Savin I.V., Schehtman G.A. 1994. VSP inverse kinematic problem for the medium with not plain bounds (*in Russian*)
- 3) Gergel V.P., Grishanin V.A., Gorodetskiy S.Y. 2001. Modern methods of optimal solutions, Nizhniy Novgorod (*in Russian*)
- 4) Tabakov A.A., Soltan I.E., Reshetnikov A.V., Reshetnikov V.V. 2002. Dynamic decomposition of wave fields and reconstruction of medium model in VSP data processing, «Galperin Readings-2002» pp.12-13 (*in Russian*)

Brief biography of the authors

ALEXANDER TABAKOV, 1941.

Graduated Tashkent Polytechnical Institute in 1964

Awarded PhD degree in 1985

- chief of seismic software development group in 1964 to 2006

- General manager of GEOVERS ltd., chief of VSP department, Central Central Geophysical Expedition

STEPCHENKOV URIJ , 1982, Leningrad

1999-2003: Bachelor's degree in Physics, Saint-Petersburg State

University, Faculty of Physics

2003-2006: Master's degree in Physics, Saint-Petersburg State University,

Faculty of Physics, Department of Computational Physics

Central Geophysical Expedition, GEOVERS ltd.

- direct kinematic problems

- inverse kinematic problems

ANTON RESHWYNIKOV:1982, Leningrad

1999-2003: Bachelor's degree in Physics, Saint-Petersburg State

University, Faculty of Physics

2003-2006: Master's degree in Physics, Saint-Petersburg State University,

Faculty of Physics, Department of Computational Physics

- 2d ray migration

- interactive solution of inverse kinematic and dynamic geophysical problems for complicated 2d mediums.

- 2d and 3d geological models description

GEOVERS Ltd. 02/2001 - present time

NATALIA RYKOVSKAYA, 1984, Krasnogorsk, Moscow Region

2004-2006 Master of Geology (specialized in Geophysical methods of the Earth crust exploration),

Lomonosov Moscow State University, Faculty of Geology

2000-2004 Bachelor of Geology, Lomonosov Moscow State University, Faculty of Geology

Central Geophysical Expedition, GEOVERS ltd.

- borehole seismic survey